


# BRS-EBS (MMDS) Waveguide Adapters

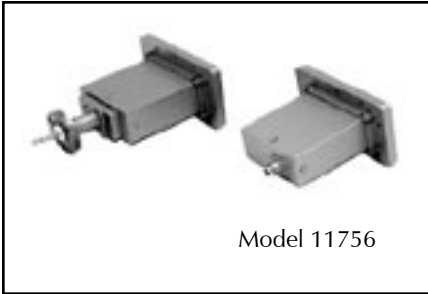


Model 11756

Microwave Filter offers a complete line of copper waveguide to coax adapters. They can be ordered in virtually any connector orientation with your choice of connector types. These adapters allow for easy mounting and cable access. Where space availability is limited, choose the adapter orientation that matches this limitation.

All 11756, 11757 and 11758 Models adapt the specified waveguide to coaxial connections with 1.15:1 VSWR and 0.2 dB maximum loss.

## **Model 11756 End Launch Waveguide Adapter**

Model #	Conn.	Freq. Range	Flange
11756-1	N Female	2.0 - 2.3 GHz	CPR 430
11756-2	7/8" EIA	2.0 - 2.3 GHz	CPR 430
11756-3	N Female	2.15 - 2.7 GHz	CPR 340
11756-4	7/8" EIA	2.15 - 2.7 GHz	CPR 340

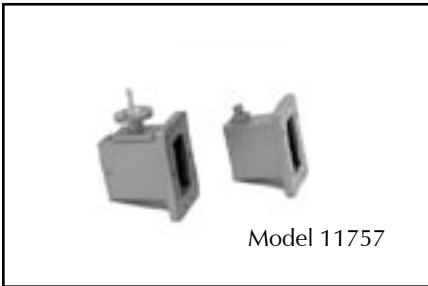

Model 11757

## **Model 11757 Narrow Wall Waveguide Adapter**

Model #	Conn.	Freq. Range	Flange
11757-1	N Female	2.0 - 2.3 GHz	CPR 430
11757-2	7/8" EIA	2.0 - 2.3 GHz	CPR 430
11757-3	N Female	2.5 - 2.7 GHz	CPR 340
11757-4	7/8" EIA	2.5 - 2.7 GHz	CPR 340
11757-5	N Female	2.3 - 2.5 GHz	CPR 340
11757-6	7/8" EIA	2.3 - 2.5 GHz	CPR 340



Model 11758

## **Model 11758 Broadwall Waveguide Adapter**

Model #	Conn.	Freq. Range	Flange
11758-1	N Female	2.0 - 2.3 GHz	CPR 430
11758-2	7/8" EIA	2.0 - 2.3 GHz	CPR 430
11758-3	N Female	2.5 - 2.7 GHz	CPR 340
11758-4	7/8" EIA	2.3 - 2.7 GHz	CPR 340
11758-5	N Female	2.15 - 2.17 GHz	CPR 340
11758-6	7/8" EIA	2.15 - 2.17 GHz	CPR 340



**MICROWAVE FILTER COMPANY, INC.**

6743 Kinne Street, East Syracuse, NY 13057 • Toll Free: 800-448-1666 or 888-206-6610

www.microwavefilter.com • email: mfcsales@microwavefilter.com • International: 315-438-4700