






Isolator/Circulator

IS-1722-100N-NM/NF

Specifications:

Frequency Range:	1700-2200 MHz
Insertion Loss:	0.5 dB Max
Isolation:	20 dB Min
VSWR:	1.25:1 Max
Average Power:	100 Watts Max
Reflection Power:	100 Watts Max
Impedance:	50 Ohms
Connectors:	N male, N female
Operating Temp. Range:	-10°C to +70°C

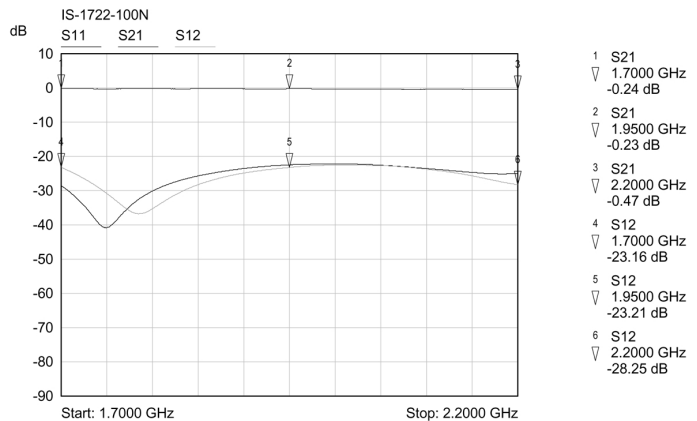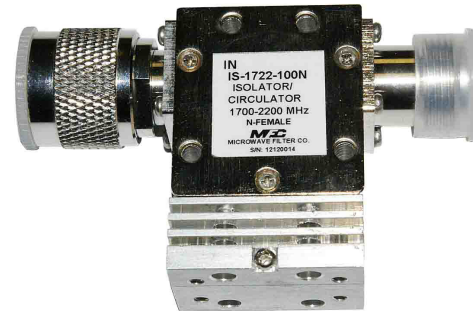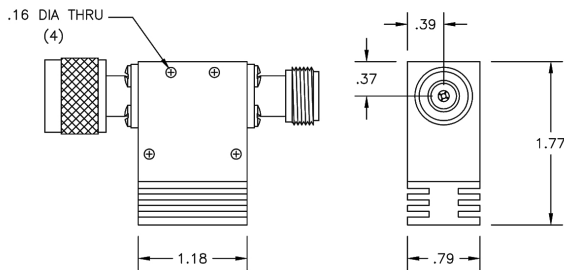

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com