





# Mobile Radio (New Zealand) Lowpass Filter

## Model 19526

This lowpass filter prevents undesired inter-action between this mobile radio band and other bands operating above this band.

### Specifications:

Passband:	120 - 160 MHz
Passband Loss:	0.5 dB Max
Passband VSWR:	1.5:1 Max
Passband Power (CW):	30 Watts Max
Rejection:	40 dB Min from 220 – 239 MHz 60 dB Min from 240 – 400 MHz 50 dB Min from 401 – 1200 MHz
Impedance:	50 Ohms
Connectors:	BNC-female (Input) / BNC-male (Output)
Dimensions:	4.00" x 1.50" x 1.02" (102mm x 38mm x 26mm)

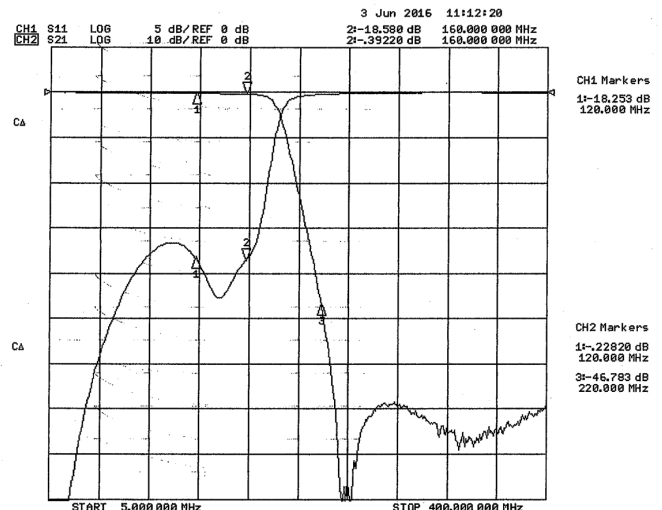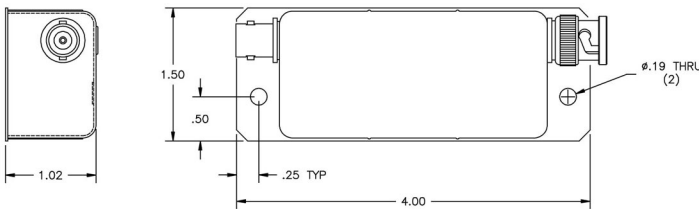

**MICROWAVE FILTER CO., INC.**  
6743 KINNE STREET, E. SYRACUSE, NY 13057  
E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

800-448-1666 • 315-438-4700  
Web: [www.microwavefilter.com](http://www.microwavefilter.com)