




# Ku-Band Transmit Reject Filter


## Model 16181

This extremely compact filter is ideal for band-specific downlink applications. (e.g. - Aussat, Japan CS, DBS)



### Specifications:

Passband:	12.25 - 12.75 GHz
Insertion Loss:	0.2 dB Max
VSWR:	1.25:1 Max
Reject Band:	14.00 - 14.50 GHz
Rejection:	45 dB Min
Flanges:	FUBR-120 AND FPBR-120
Weight:	0.42 lbs (0.2 Kg)
Dimensions:	1.195" x 1.5" x 1.5" (30mm x 38mm x 38mm)
Finish:	Chem Film per Mil-C-5541, Class 3

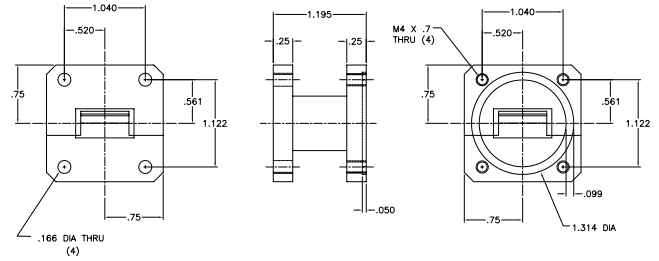

**MICROWAVE FILTER CO., INC.**  
6743 KINNE STREET, E. SYRACUSE, NY 13057  
E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

800-448-1666 • 315-438-4700  
Web: [www.microwavefilter.com](http://www.microwavefilter.com)