







Ku-Band Receive Bandpass Filter

Model 17896


This multi-purpose Ku-band receive filter rejects interfering signals **above** (*Ku-band Transmit*) and **below** (*Marine Radionavigation*) the receive band.

- *Ideal for Maritime VSAT Applications (i.e. - commercial vessels, yachts, oil platforms, etc.)*
- *True Bandpass Response – This filter will also reject other potential sources of interference above and below the band.*
- *Alternate Flange Configurations are Available Upon Request*

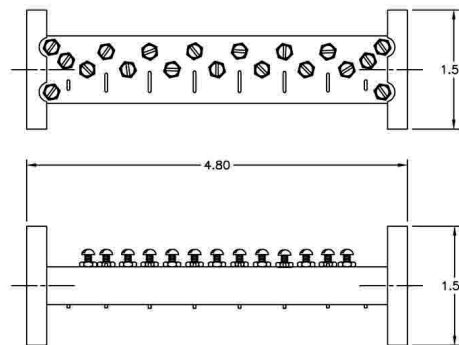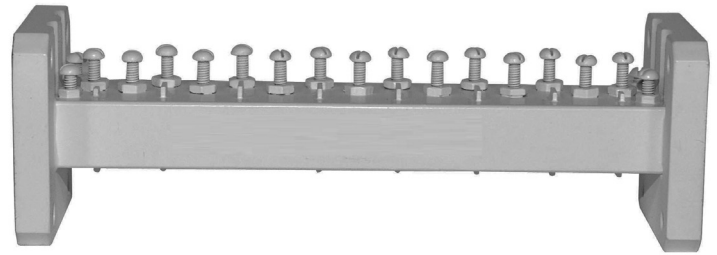

Specifications:

Passband:	10.95 - 12.75 GHz
Insertion Loss:	0.5 dB Max
VSWR:	1.25:1 Max
Power:	1 Watt
Reject Bands:	DC - 9 GHz 9 - 10 GHz 13.75 - 14.6 GHz
Rejection:	50 dB Min except 70 dB Typ from DC - 9 GHz
Flanges:	WR75 Grooved (Input) WR75 Cover (Output)
Weight:	0.45 lbs (0.2 Kg)
Dimensions:	4.80" x 1.50" x 1.50" (122 mm x 38 mm x 38 mm)
Finish:	Gray Lacquer

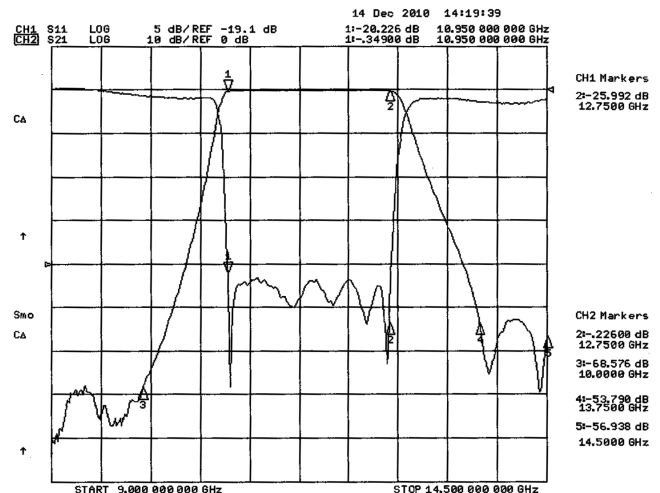

MICROWAVE FILTER CO., INC.
 6743 KINNE STREET, E. SYRACUSE, NY 13057
 E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
 Web: www.microwavefilter.com