

Broadcast Auxiliary Band (7 GHz) Bandpass Filters


Model 19322-(Fo)

These bandpass filters isolate the desired 7 GHz auxiliary band channel from virtually all potential sources of interference operating above and below the designated channel - including other 7 GHz band transmissions.

Specifications:

Center Frequency (Fo) Option	6.9 - 7.1 GHz
Passband Bandwidth	25 MHz Min
Passband Insertion Loss	2.0 dB Max
Rejection	50 dB Typ \pm 150 MHz from Fo
Impedance	50 ohms
Connectors	SMA - female
Environment	Indoor Use

Alternate connectors are available upon request.

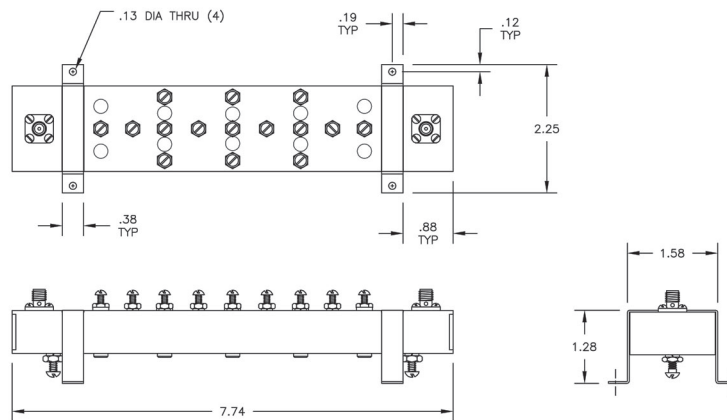

MICROWAVE FILTER COMPANY, INC.

6743 Kinne Street, East Syracuse, NY 13057 • Toll Free: 800-448-1666 or 888-206-6610

www.microwavefilter.com • email: mfcsales@microwavefilter.com • International: 315-438-4700